

This firmware update is intended for use with the UltraAV 4x4 HDMI Matrix Switch, part number K072C-008B

The program "EP Flash" is available for download at <http://ap.koryo.com.tw>
Download version 1.1.0.8


How to install/update system software

1. Install EP FLASH (Windows 98/ME/XP/Vista).
2. Open EP FLASH Application Program




3. Turn OFF the system Main Power Switch
4. Plug-out any HDMI cables from system input port
5. Plug-in the USB to mini USB cable (One side is PC, another side is system)
6. Turn ON the system Main Power Switch
7. EP FLASH will auto detect the upgrade system and change PORT to "USB 0"



Name	Date modif...	Type	Size
 4X4_Matrix_Remote2.hex			

8. Click "OpenFile" button from EP FLASH, then select the upgrade file.

9. Check "Program with Verification" and "Reload File Before Program", then Click the "**START**" button

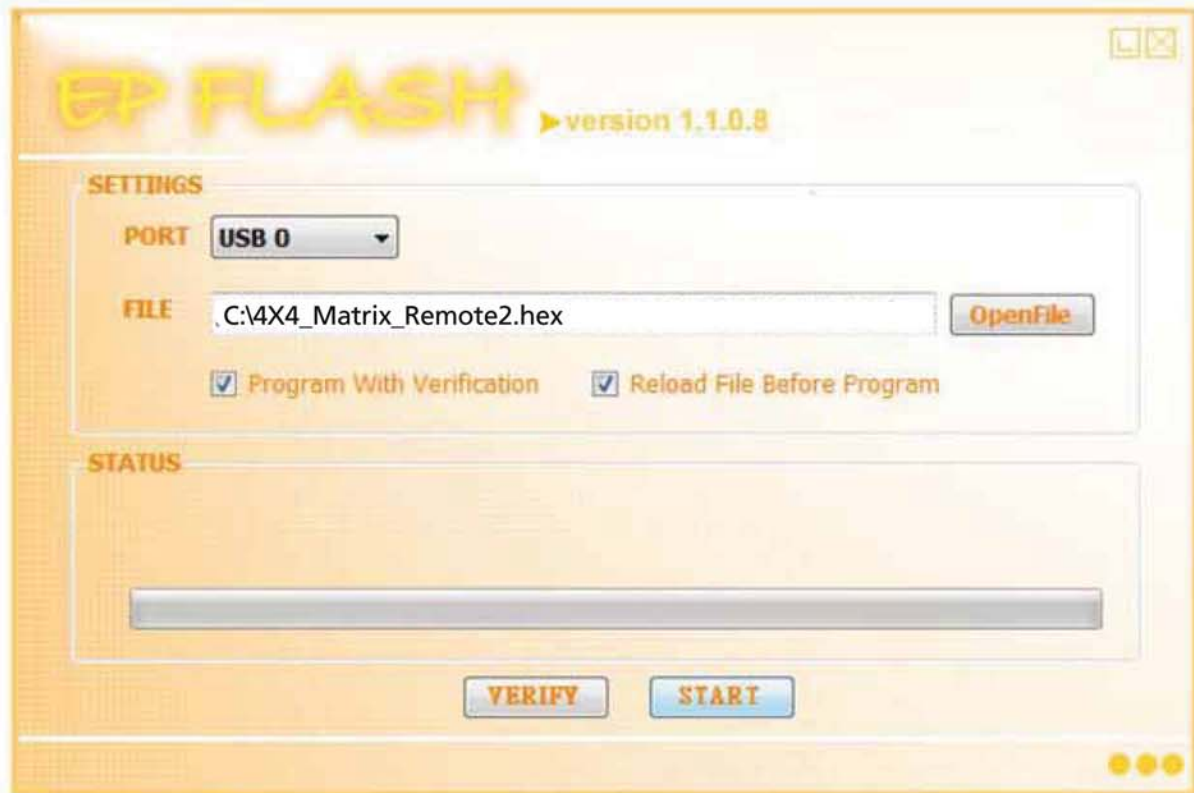

10. After process bar ready, Plug out the USB cable and turn OFF& ON the system Main Power Switch again.



Firmware upgrade is complete.